



Tecumseh designed by LU-VE



Tecumseh

General Features

- 3 fan diameter sizes – one through four fan motors in each size
- Capacity range from 3,900-58,000 BTU/h airflow from 560-6062 CFM
- Powder coated epoxy-polyester finish with corrosion-resistant galvanized steel casing

Add on Options (no more dashes)

Voltage

- 1 is 115V
- 2 is 230V
- D is 115/230V dual voltage

ADD BELOW OPTIONS AFTER VOLTAGE CODE


Loose metering device w/solenoid

- TXSA for R404A
- TXSB for R448/9A
- TXSC for R452A

Mounted metering device w/solenoid

- TXSMA for R404A w/solenoid
- TXSMB for R448/9A w/solenoid
- TXSMC for R452A w/solenoid

EVD = controller for EVD ICE – Mounted only

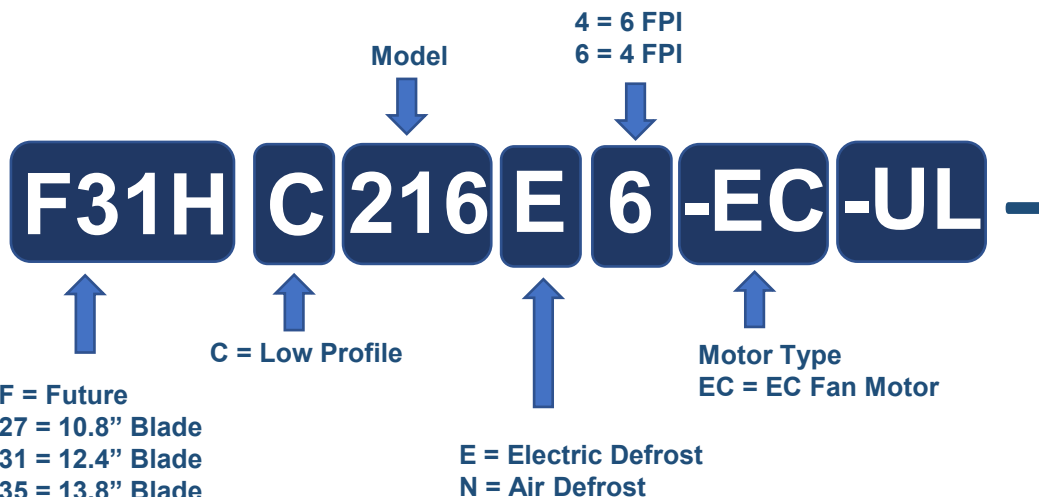

Note – Not ALL configuration combinations may be available